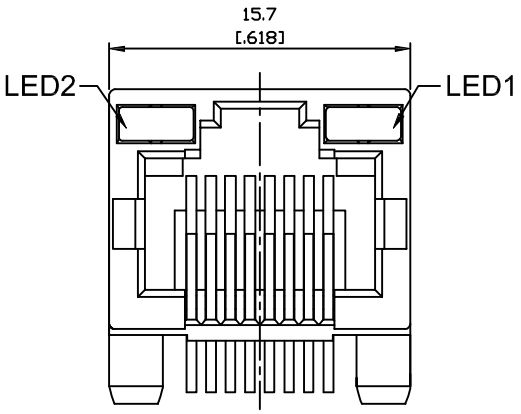

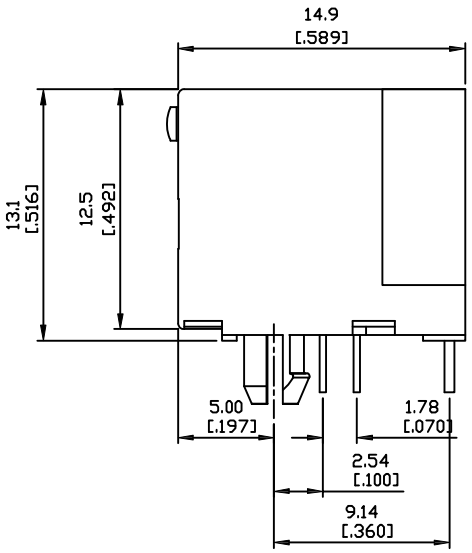

Material:

Housing: Thermoplastic UL94V-0

Contact: Selective Gold Plating

Terminal: 0.35mm Thickness Phosphor Bronze Plated With Gold And Tin In Solder Area.

Shield: Brass,Nickel Plating.

Electrical Characteristics:

Insulation Resistance: 500M ohm Min.

Insulation Resistance: 50m ohm Max.

Withstand Voltage: 1000VAC 1 minute.

Current Rating: 1.5A

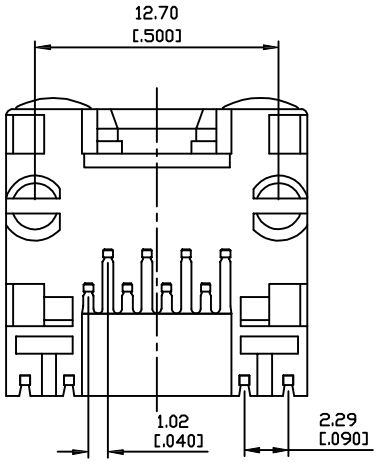

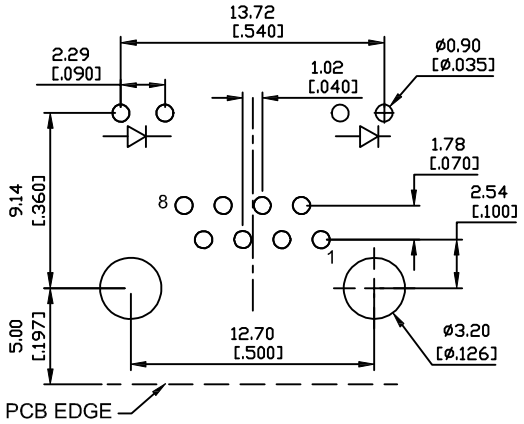

SUGGESTED PCB LAYOUT
TOP VIEW

REV	ECN NO	DESCRIPTION	APPD.	DATE
A	–	DWG.REL.	Mari	03.23'2009

PROD. NO.	LED COLOR OPTION	
	LED2 (LEFT)	LED1 (RIGHT)
992-201-0008	NO LED	NO LED

PROPRIETARY NOTE:
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO LONGWELL COMPANY AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF LONGWELL COMPANY.

X. ±	APPD: Mari Chen 03.23'2009	Longwell
.X ± 0.25[.010]		
.XX ± 0.15[.006]	CHKD: Mari Chen 03.23'2009	TITLE: RJ45 JACK WITH LED PCB JACK 1*1PORT
.XXX± 0.075[.003]		
X° ± 5°	DR: Betty Tai 03.23'2009	DWG NO: 992-201-0000
.X° ± 1.0°		
UNITS: mm [INCH]	SCALE: NONE	SHEET: 1 OF 1 REV: A